

0RQB-C5U54x

Isolated DC-DC Converter

The 0RQB-C5U54x is an isolated DC-DC converter that operates from a nominal 24 VDC, 48 VDC source.

This unit will provide up to 162 W of output power from a nominal 24 VDC, 48 VDC input. This unit is designed to be highly efficient.

Features include over current protection, overvoltage protection and input under-voltage lockout



Key Features & Benefits

- 24/48 VDC Input
- 54 VDC @ 3 A Output
- 1/4th Brick Converter
- Fixed Frequency
- High Efficiency
- Output Over-Voltage Protection
- Over Temperature Protection
- Input Over / Under Voltage Lockout
- Over Current and Short Circuit Protection
- Approved to UL/CSA/IEC60950-1, 2nd +A2 Version
- Class II, Category 2, Isolated DC-DC Converter (refer to IPC-9592B)



Applications

- Industrial
- Computers and Peripherals
- Telecommunications



bel POWER
SOLUTIONS &
PROTECTION

a bel group

belfuse.com/power-solutions

1. MODEL SELECTION

MODEL NUMBER	OUTPUT VOLTAGE	INPUT VOLTAGE	MAX. OUTPUT CURRENT	MAX. OUTPUT POWER	TYPICAL EFFICIENCY
0RQB-C5U54x	54 VDC	24/48 VDC	3 A	162 W	89%

NOTE: Add “G” suffix at the end of the model number to indicate Tray Packaging.

PART NUMBER EXPLANATION

0	R	QB	-	C5	U	54	x	G
Mounting Type	RoHS Status	Series Name		Output Power	Input Range	Output Voltage	Active Logic	Package Type
Through Hole Mount	RoHS	1/4th Brick		162 W	24/48 V	54 V	L- Active low, with base plate, 0- Active high, with base plate	G - Tray package

2. ABSOLUTE MAXIMUM RATINGS

PARAMETER	DESCRIPTION	MIN	TYP	MAX	UNITS
Input Voltage	Continuous Non-operating	-0.5	-	80	V
Remote On/Off		-0.3	-	15	V
Isolation Voltage	Input to output	-	-	2250	VDC
Operating Temperature	Temperature measured at the center of the baseplate, full load	-40	-	90	°C
	Temperature measured at the center of the baseplate, half load	-40	-	95	°C
Thermal Resistance	Baseplate to heatsink, flat greased surface	-	0.24	-	°C /W
Storage Temperature		-55	-	125	°C
Altitude		-	-	2000	m

NOTE: Ratings used beyond the maximum ratings may cause a reliability degradation of the converter or may permanently damage the device.

3. INPUT SPECIFICATIONS

All specifications are typical at 25°C unless otherwise stated.

PARAMETER	DESCRIPTION	MIN	TYP	MAX	UNIT
Operating Input Voltage		18	-	75	V
Input Current		-	-	11	A
Input Current (no load)	Vin = 48 V, Ta = 25°C	-	100	150	mA
Input Reflected Ripple Current (rms)	With simulated source impedance of 12 μ H, 5 Hz to 20 MHz. Use a 47 μ F/100 V electrolytic capacitor with ESR = 1 ohm max, at 25°C.	-	-	15	mA
Input Reflected Ripple Current (pk-pk)		-	-	50	mA
Under-Voltage Turn on Voltage Threshold	Turn on threshold	16	16.8	17.5	V
Under-Voltage Turn off Voltage Threshold	Lockout turn off, non-latching	14	15	15.5	V
Over-Voltage Shutdown Threshold	Auto-recovery and non-latching.	76.5	78	80.3	V
Over-Voltage Recovery Threshold		76	77	78	V
Input Fast-Acting Fuse	Recommended (on system board)	-	15	-	A

CAUTION: This converter is not internally fused. An input line fuse must be used in application.

4. OUTPUT SPECIFICATIONS

All specifications are typical at nominal input, full load at 25°C unless otherwise stated.

PARAMETER	DESCRIPTION	MIN	TYP	MAX	UNIT
Output Voltage Set Point	Test condition of the output set point: Vin=48V, Io=100% load at 25°C ambient.	53	54	55	V
Load Regulation		-	50	100	mV
Line Regulation		-	50	100	mV
Regulation Over Temperature		-	±200	±350	%/°C
Ripple and Noise (pk-pk)	40 KHz – 100 MHz BW, with a 0.1uF ceramic cap and 220uF electrolytic cap at output.	-	-	300	mV
Ripple and Noise (rms)		-	-	100	mV
Output Current Range		0	-	3	A
Output DC Current Limit	Enter a hiccup mode, non-latching.	3.45	4	4.6	A
Rise Time		-	0.5	1	s
Start-up Time (from Venable and Vin)	Vin = 48 V, Io = 3 A, with 1000 µF bulk electrolytic at output.	-	-	2	s
Overshoot at Turn on		-	0	3	%
Undershoot at Turn off		-	0	3	%
Output Capacitance		200	-	1000	µF
Transient Response					
ΔV 50%~75% of Max Load		-	-	3	%Vout
Settling Time	di/dt = 0.1 A/us, with 1000 µF bulk electrolytic at output.	-	-	2.5	ms
ΔV 75%~50% of Max Load		-	-	3	%Vout
Settling Time		-	-	2.5	ms

5. GENERAL SPECIFICATIONS

PARAMETER	DESCRIPTION	MIN	TYP	MAX	UNIT
Efficiency	Io=60% Irate -100%	87	89	-	%
	Irate	85	87	-	%
	Io=40% Irate-60% Irate				
Switching Frequency	TA = 25°C, natural-convection air cooler	-	200	-	kHz
Output Voltage Trim Range		50	-	56	V
Over Temperature Protection	Baseplate temperature.	-	120	-	°C
Over Voltage Protection(Static)	Enter a latching, non-hiccup mode	57.5	58	58.5	V
FIT	Calculated Per IEC 62380 TR 1	-	177.58	-	-
MTBF	(UTEC 80-810) (Vin = 24 V, Vo = 54 V, Io = 3A, 0 LFM, Tac = 50°C, Tae = 35°C)	-	5.63	-	Mhrs
Weight		-	68	-	g
Dimensions (L x W x H)			2.30 x 1.45 x 0.59 58.42 x 36.84 x 15		inch mm
Isolation Characteristics					
Input to Output		-	-	2250	V
Input to Heatsink		-	-	2250	V
Output to Heatsink		-	-	2250	V
Isolation Resistance		10M	-	-	Ohm
Isolation Capacitance		-	-	3900	pF

Notes: All specifications are typical at 25 °C unless otherwise stated.




Asia-Pacific
+86 755 298 85888



Europe, Middle East
+353 61 225 977

North America
+1 408 785 5200

6. EFFICIENCY DATA

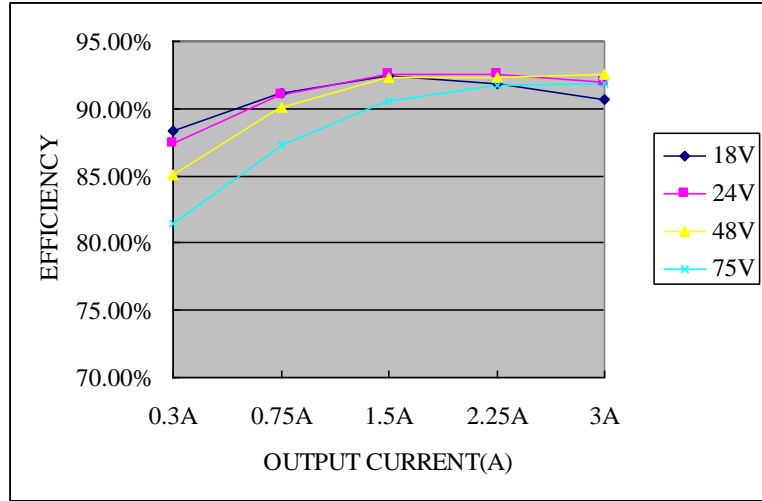


7. THERMAL DEARTING CURVES

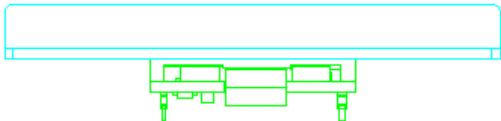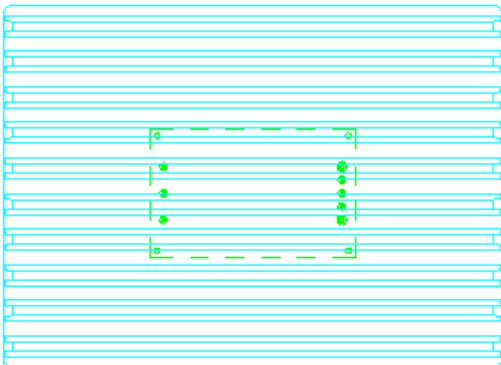

Vin Vout


HSK Dimension:142x110x16mm

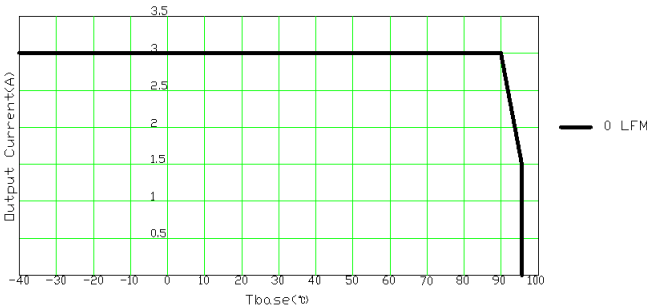


8. REMOTE ON/OFF

PARAMETER		DESCRIPTION	MIN	TYP	MAX	UNIT
Signal Low (Unit On)	Active Low	Remote On/Off pin is open, the module is off.	-0.3	-	0.8	V
Signal High (Unit Off)			2.4	-	15	V
Signal Low (Unit Off)	Active High	Remote On/Off pin is open; the module is on.	-0.3	-	0.8	V
Signal High (Unit On)			2.4	-	15	V
Current Sink			0	-	1	mA


Recommended remote on/off circuit for active low

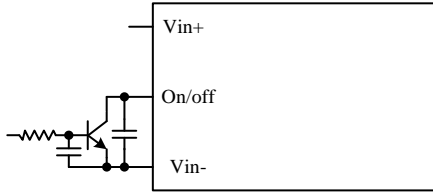


Control with open collector/drain circuit

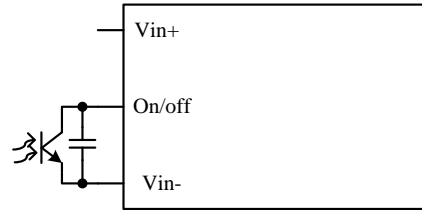

Control with photocoupler circuit

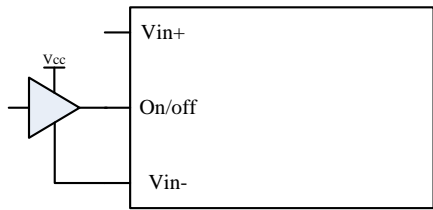


Control with logic circuit




Permanently on


Recommended remote on/off circuit for active high

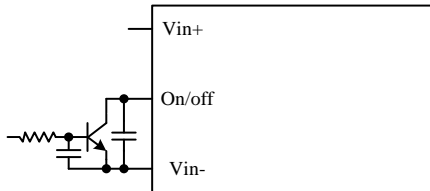


Control with open collector/drain circuit

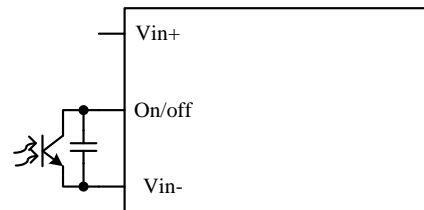

Control with photocoupler circuit

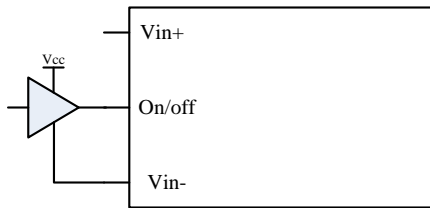

Control with logic circuit



Permanently on

9. REMOTE SENSE

This module has remote sense compensation feature. It can minimize the effects of resistance between module's output and load in system layout and facilitates accurate voltage regulation at load terminals or other selected point.


The remote sense lines carries very little current and hence do not require a large cross-sectional area.

This module compensates for a maximum drop of 4% of the nominal output voltage.


If the unit is already trimmed up, the available remote sense compensation range should be correspondingly reduced. The total voltage increased by trim and remote sense should not exceed 4% of the nominal output voltage.

When using remote sense compensation, all the resistance, parasitic inductance and capacitance of the system are incorporated within the feedback loop of this module. This can make an effect on the module's compensation, affecting the stability and din.

Recommend the connection of remote sense compensation as below figure. There are a resistor RS+ (100 ohm) from Vo+ to Sense+ and a resistor RS- (100 ohm) from Vo- to Sense- inside of this module.

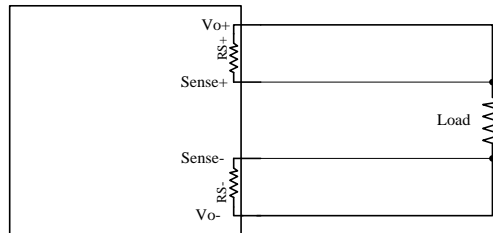


If not using remote sense compensation, please connect sense directly to output at module's pin, that is, connect sense+ to Vo+ and sense- to Vo- at module's pin, the shorter the better. see below figure.

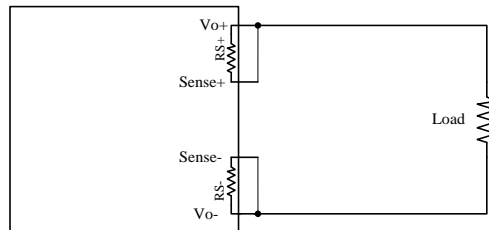


10. TRIM

Trim down test circuit

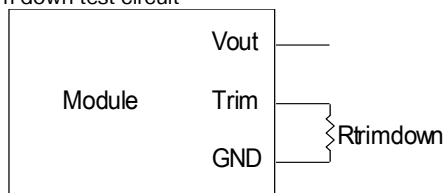

$$R_{trimdown} = \frac{V_{o_req}}{54 - V_{o_req}} - 1 [k\Omega]$$

Trim up test circuit

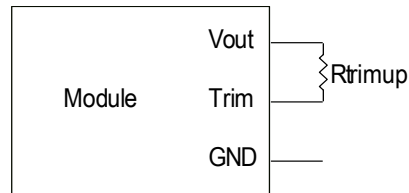

$$R_{trimup} = \frac{1 - 0.02296}{0.02296 - 1.24 / V_{o_req}} - 1 [k\Omega]$$


Note: V_{o_req} = Desired(trimmed) output voltage[V]

Safety:

CSA certificated to UL/IEC60950-1,2nd +A2 version

CB certificated to IEC60950-1,2nd +A2 version


11. RIPPLE AND NOISE WAVEFORM

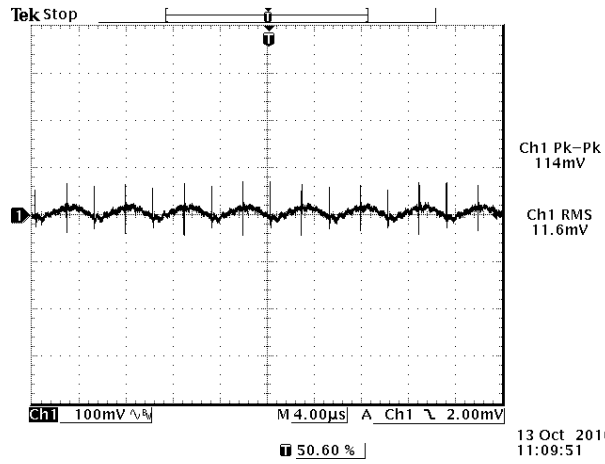


Ripple and noise 24Vdc input, 54Vdc/3A output and $T_a=25$ deg C, and with a 0.1µF ceramic cap and 220µF electrolytic cap at output.

12. TRANSIENT RESPONSE WAVEFORMS

Transient Response: $di/dt=0.1A/\mu S$, 0.1 μF ceramic cap and 1000 μF electrolytic cap at output.

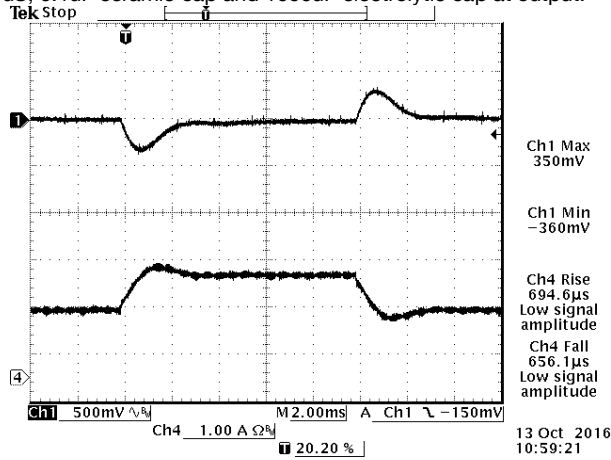


$V_{out}= 54V$ 50%-75% Load Transients at $V_{in}=24V$, $T_a=25$ deg C

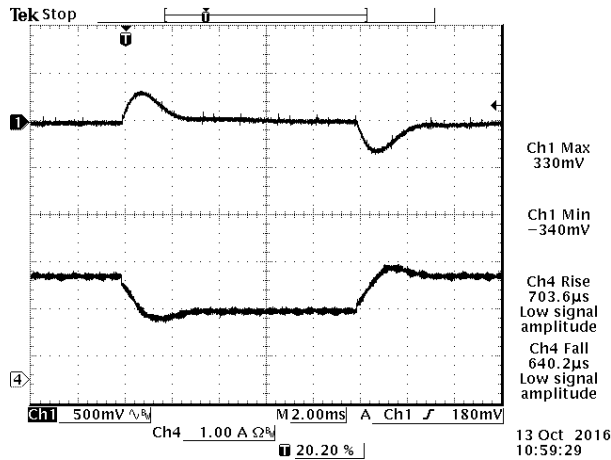

13. STARTUP&SHUTDOWN

Startup

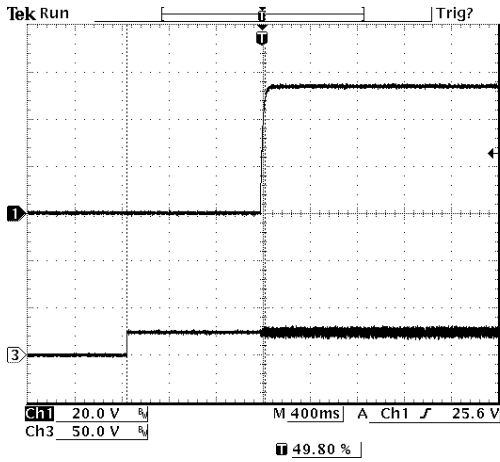


Startup from Vin

Ch1: Vo

Ch3: Vin

Test Condition: Vin=48V, Vout=54V, Iout=3.0A and Ta=25 deg C, Co=1000uF

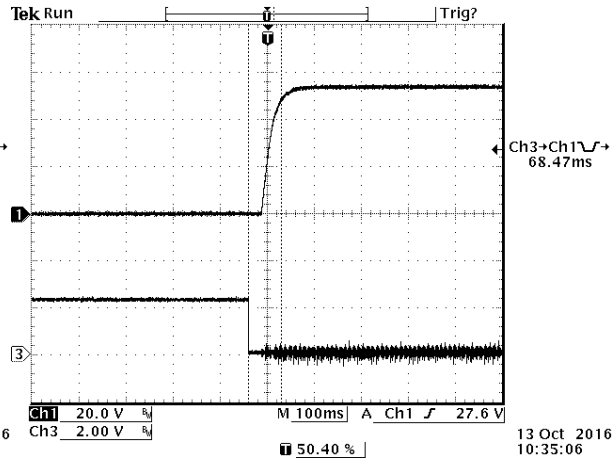


Startup from on/off (for 0RQB- C5U54L)

Ch1: Vo

Ch3: on/off

Test Condition: Vin=48V, Vout=54V, Iout=3.0A and Ta=25 deg C, Co=1000uF

Shutdown

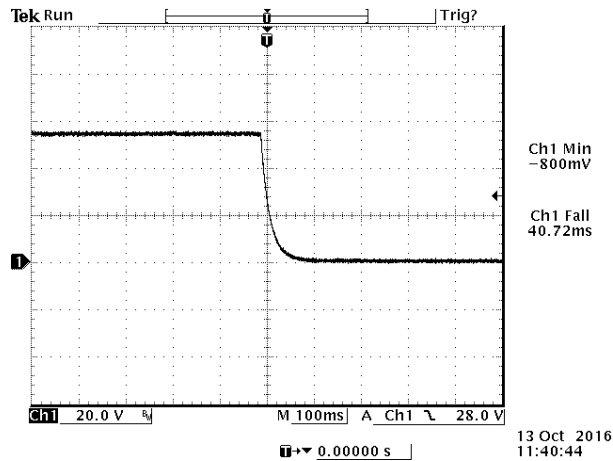


Test Condition: Vin=48V, Vout=54V, Iout=3.0A and Ta=25 deg C, Co=1000uF


14. OCP

Requirement: Describe OCP is in hiccup mode or latch off mode. If in hiccup mode, please provide the waveform of OCP which should include 2~3 restart cycles, and mark the time of restart period. It is better to provide the waveform of zooming in to show the time of working.

Hiccup: To provide protection in a fault output overload condition, the module is equipped with internal current-limiting circuitry and can endure current limiting for a few milli-seconds. If the overcurrent condition persists beyond a few milliseconds, the module will shut down into hiccup mode and restart once every 800mS. The module operates normally when the output current goes into specified range.

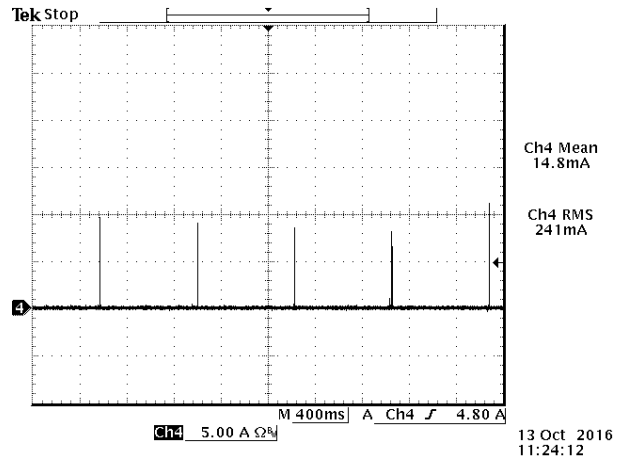

15. MECHANICAL DIMENSIONS

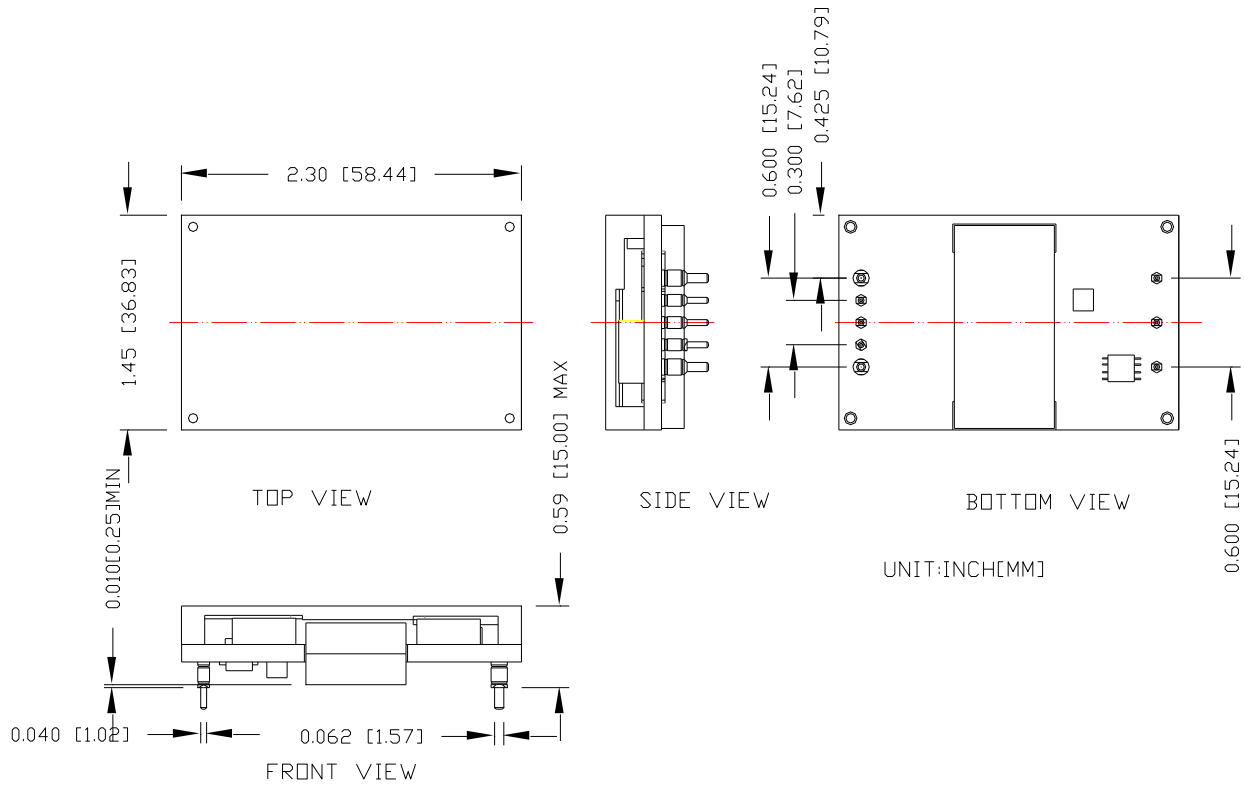

Note: This module is recommended and compatible with Pb-Free Wave Soldering and must be soldered using a peak solder temperature of no more than 260 °C for less than 5 seconds.

All Pins: Material - Copper Alloy;
Finish - Tin plated.


Undimensioned components are shown for visual reference only.

All dimensions in inches; Tolerances: x.xx +/-0.02 in [0.5 mm]. x.xxx +/-0.010 in [0.25 mm]. Unless otherwise stated.

In pin definition, "NA" means no pin is assembled, the corresponding function is not available.

MECHANICAL DIMENSIONS


PIN DEFINITIONS

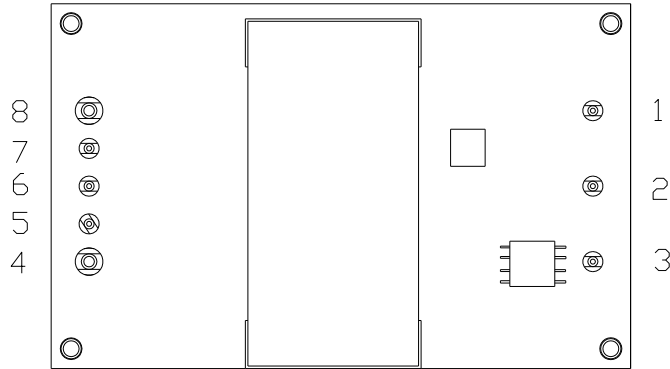

PIN	FUNCTION	PIN	FUNCTION
1	Vin (+)	5	Sense(-)
2	ON/OFF	6	Trim
3	Vin (-)	7	Sense(+)
4	Vout(-)	8	Vout(+)

RECOMMENDED PAD LAYOUT

RECOMMENDED PAD LAYOUT

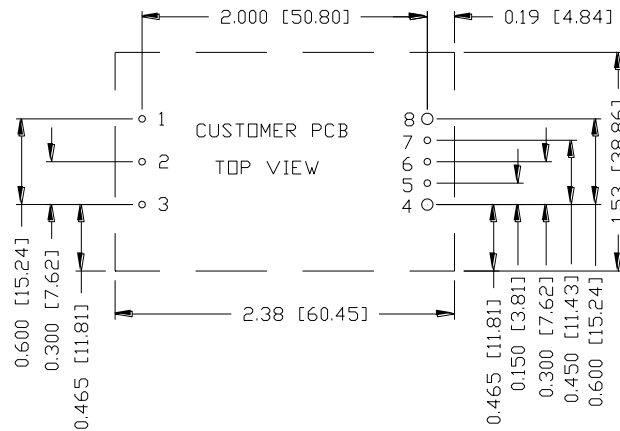

1,2,3,5,6,7 \varnothing 0.047 HOLE SIZE, \varnothing 0.08 min PAD SIZE
 4,8 \varnothing 0.07 HOLE SIZE, \varnothing 0.10 min PAD SIZE

16. REVISION HISTORY

DATE	REVISION	CHANGES DETAIL	APPROVAL
2013-05-13	A	First release	S.Wang
2013-05-21	B	Update General	J.Yan
2013-06-25	C	Update General	J.Yan
2013-12-17	D	Update Abs Max, Output Specs, General, Efficiency Data, TD, MD	J.Yan
2014-02-13	E	Update TD	J.Yan
2014-02-26	F	Update Input Specs and TD	J.Yan
2014-02-28	G	Update TD	J.Yan
2014-09-03	H	Update Input and out specs	J.Yan
2014-12-24	I	Update MTBF and FIT	J.Yan
2015-02-10	J	Update MD, Description	J.Yan
2015-10-23	K	Update the maximum module height from 0.57" to 0.59".	J.Yan
2016-02-26	L	Update Absolute maximum rating	J.Yan
2016-04-21	M	Update Safety Certification, MTBF, Thermal Derating Curve.	J.Yan
2017-06-07	AN	Update the version.	J.Yan
2018-05-17	AO	Add NR, TR, Abs Max, Startup&Shutdown and OCP	J.Yao
2019-02-18	AP	Update test condition for Ripple and Noise (pk-pk)	J.Yao

For more information on these products consult: tech.support@psbel.com

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.



Asia-Pacific
+86 755 298 85888

Europe, Middle East
+353 61 225 977

North America
+1 408 785 5200