



MELCHER
The Power Partners.
a bel power solutions brand

Bel Power Solutions for Railway and Industrial



bel POWER
SOLUTIONS &
PROTECTION
a bel group

AVNET® **ABACUS**

DIN Rail Products

The Melcher LX / LW Series of Industrial / Transportation DIN Rail power supply units have been designed for rugged and harsh environments, where reliability is critical, featuring single or dual outputs and battery charging options.



MODEL	INPUT VOLTAGE	OUTPUT VOLTAGES	OUTPUT CURRENT	OUTPUT POWER	EFFICIENCY
LW-Series, single	85 – 264 VAC, 90 – 350 VDC	12, 24, 36, 48 VDC	2.5 to 14 A	125 W	83, 87, 88%
LW-Series, dual	85 – 264 VAC, 90 – 350 VDC	2x 12, 2x 24, 2x 36, 2x 48 VDC	5 to 2x 7 A	250 W	83, 87, 89%
LX-Series, triple	85 – 264 VAC, 90 – 350 VDC	24, 36, 48 VDC	7.5 to 20 A	375 W	87 – 88%
LX-Series, quad	85 – 264 VAC, 90 – 350 VDC	2x 24, 2x 36, 2x 48 VDC	10 to 2x 10 A	500 W	87 – 88%
EW- Series, single / dual	66 – 150 VDC	24 or 2x 24 VDC	5, or 2x 5 A	120, 240 W	87%

Non-Isolated Buck DC-DC Converters

Bel Power Solutions offers a wide range of positive switching regulators designed as power supplies for electronic systems, where no input-to-output isolation is required. Their major advantages include a high level of efficiency, high reliability, low output ripple, and excellent dynamic response.



MODEL	INPUT VOLTAGE	OUTPUT VOLTAGES	OUTPUT CURRENT	MOUNT	SIZE (in / mm)
PSR Series	7 – 40, 8 – 80 VDC	0 – 36 VDC	2 – 4 A	PCB, Chassis	2 x 2.8 x 1 / 50 x 70 x 25
PSA Series	7 – 35, 18 – 156 VDC	0 – 48 VDC	1 – 5 A	PCB, Chassis	2 x 2.8 x 1 / 50 x 70 x 25
PSB Series	7 – 40, 8 – 80, 15 – 156 VDC	0 – 48 VDC	4 – 8 A	PCB, Chassis	2.7 x 4.2 x 1.3 / 60 x 106 x 32
PSC Series	7 – 40, 8 – 80, 18 – 156 VDC	0 – 48 VDC	6 – 12 A	PCB, Chassis	3.5 x 5.9 x 1.3 / 88 x 151 x 32
PSL Series	7 – 40, 8 – 80, 18 – 156 VDC	0 – 48 VDC	6 – 12 A	Cassette 3 U / 8 TE	19" Rack 1.5 x 6.6 x 4.2 / 37 x 168 x 107
PSS Series	8 – 40, 8 – 80, 18 – 156 VDC	0 – 48 VDC	9 – 18 A	Cassette 3 U / 12 TE	19" Rack 2.4 x 6.6 x 4.4 / 60 x 168 x 111
PSK Series	8 – 40, 8 – 80, 18 – 156 VDC	0 – 48 VDC	12 – 25 A	Cassette 3 U / 16 TE	19" Rack 3.2 x 6.6 x 4.4 / 80 x 168 x 111

Compact PCI Cassette Converters

The CPA and CPD Series are highly reliable power supplies for CompactPCI® systems, which are increasingly used in communications, industrial, military, aerospace, and other applications. These power supplies offer high power density in plug-in modules that meet the requirements of the PICMG® power interface specification for CompactPCI® systems.

MODEL	INPUT VOLTAGE	OUTPUT VOLTAGES	OUTPUT CURRENT	OUTPUT POWER	EFFICIENCY	SIZE
CPA250-4530G	90 – 264 VAC	5, 3.3, ±12 VDC	40, 40, 5, 2 A	250 W	82.5%	3 U x 8 TE
CPA500-4530G	90 – 264 VAC	5, 3.3, ±12 VDC	50, 60, 12, 4 A	500 W	84.5%	6 U x 8 TE
CPD250-4530G	36 – 75 VDC	5, 3.3, ±12 VDC	40, 40, 5, 2 A	250 W	82%	3 U x 8 TE
CPD500-4530G	36 – 75 VDC	5, 3.3, ±12 VDC	50, 60, 12, 4 A	500 W	84.5%	6 U x 8 TE



Accessories for Railway Converters

Platform Products

- 19" Racks and backplanes
- Base plates or heat sinks for chassis mounting
- Mating female connectors for solder, cage clamp or faston connections
- Connector retention devices
- Front panels for 19" rack mount
- Chassis and DIN Rail mounting kits
- Temperature sensors for optimal battery charging



DC-DC Converters for General Purpose Rail Applications

RCM Series

The RCM Series (Railway Chassis Mount) DC-DC converters are reliable power supplies for railway and transportation systems. There are two wide input voltage ranges available for 150 W and 300 W models. 500 W and 1000 W models are optimised for 110 V railway batteries. The RCM Series is designed for chassis mount applications, with integrated enclosure, operating in convection cooled environments.

Many options are available, such as an output ORing FET for redundant operation, output voltage adjustment, interruption time of 10 ms (class S2), out-ok signals, and a shutdown input.

Features



- RoHS lead-free-solder product
- Input voltage ranges:
 - 150 W / 300 W models: 24 / 36 V or 72 / 110 V batteries
 - 500 W / 1000 W models: 110 V battery
- Output voltages:
 - 150 W / 300 W models: 12 V and 24 V
 - 500 W / 1000 W models: 24 V
- Integrated enclosure for chassis mounting
- Extremely high efficiency and high power density
- Low inrush current
- 3 connectors: Input, output, auxiliary (option for 150 W / 300 W models)
- Overtemperature, overvoltage, overcurrent, and overload protection
- Compliant to EN 50155 and EN 45545

MODEL	DC INPUT VOLTAGE (cont.)	DC OUTPUT VOLTAGE	OUTPUT CURRENT	EFFICIENCY	OUTPUT POWER
24RCM150-12	24 V (16.8 – 45 V)	12 V	12.5 A	90%	150 W
24RCM150-24		24 V	6.25 A	90%	
110RCM150-12	110 V (50.4 – 137.5 V)	12 V	12.5 A	90%	150 W
110RCM150-24		24 V	6.25 A	90%	
24RCM300-12	24 V (16.8 – 45 V)	12 V	25 A	92%	300 W
24RCM300-24		24 V	12.5 A	92%	
110RCM300-12	110 V (50.4 – 137.5 V)	12 V	25 A	92%	300 W
110RCM300-24		24 V	12.5 A	92%	
110RCM500-24	110 V (77 – 137.5 V)	24 V	21 A	96%	500 W
110RCM1000-24	110 V (77 – 137.5 V)	24 V	42 A	96%	1000 W

Battery Charger

LBC Series

The LBC Series is a ruggedized battery charger consisting of two or three parallel independent AC-DC converter modules employing PFC stage and insulated DC-DC stage to convert the three-phase input voltage 400 / 480 VAC (line to line) to a bus voltage suitable for 110 V battery charging. The system includes a DSP for control and monitoring.



- Input voltage: 3x 400 / 480 VAC (350 - 528 VAC)
- Output power up to 12 kW
- High power density 13 W/in³ per unit
- 110 VDC output is decoupled with a diode for redundant applications
- Output voltage for 110 V battery (adjustable 85 – 137.5 VDC)
- Operating temperature -25 to 55°C without derating
- CAN bus / Ethernet Interface
- EN 50155, EN 50121-3-2 and EN 45545 compliant for railway applications



Rugged 3U Cassettes for 19inch Rack or Chassis Mount

The rugged MELCHER products offer the industry's premier line of standard products for DC-DC and AC-DC power conversion, including custom design capability for application specific power conversion solutions.

For over 40 years Bel's MELCHER lineup of DC-DC and AC-DC cassette-style power converters with extremely robust electrical and mechanical designs have demonstrated to provide consistent power to a diverse array of railway, signaling, communications, transportation and industrial infrastructure applications.



MODEL [†]	AC INPUT VOLTAGE	DC INPUT VOLTAGE	OUTPUT VOLTAGES	# OF OUTPUTS	OUTPUT POWER
M Series (8 TE)	85 – 264 VAC*	8 – 385 VDC (6 ranges)	5 – 60; ±12, ±15; 5/±12, 5/±15 V	1, 2 or 3	50 W
S Series (12 TE)	85 – 264 VAC* (PFC)	8 – 385 VDC (6 ranges)	5, 12, 15, 24, 48; ±12, ±15, ±24 V	1 or 2	100 W
K Series (16 TE)	85 – 264 VAC* (PFC)	8 – 385 VDC (6 ranges)	5, 12, 15, 24, 48; ±12, ±15, ±24 V	1 or 2	150 W
LKP Series (16 TE)	187 – 255 VAC (PFC)	N/A	12, 24, 48; ±12, ±24 V	1 or 2	250 W
T Series (28 TE)	70 – 140; 85 – 255 VAC (PFC)	N/A	24 – 54.5 V	1	500 W
Q Series (4 TE)	N/A	14.4 – 154 VDC (5 ranges)	3.3 – 48; ±5, ±12, ±15, ±24 V	1 or 2	82 – 132 W
P Series (4 TE)	N/A	14.4 – 154 VDC (5 ranges)	3.3 – 96 V	1, 2, 3 or 4	100 – 192 W
HP Series (4 TE)	N/A	12.5 – 154 VDC (1 range)	5 – 96 V	1, 2, 3 or 4	120 – 192 W
HR Series (12, 16 TE)	N/A	12 – 168 VDC (1 range)	±12, ±15, ±48 V	1 or 2	144 – 288 W
ER Series (12, 16 TE)	N/A	66 – 168 VDC (1 range)	±12, ±15, ±48 V	1 or 2	144 – 288 W
LR Series (12, 16 TE)	90 – 264 VAC (PFC)	N/A	±12, ±15, ±48 V	1 or 2	210 – 300 W

* 47 – 440 Hz

1 TE = 0.2"

HP Series Rugged DC-DC Cassettes



- For railway and mobility applications
- Ultra wide input range 12.5 to 154 VDC
- 1 to 4 outputs, total power up to 192 W
- EN 50155 and EN 45545 compliant
- 10 ms interruption time
- High reliability: "fit and forget"
- Compatible to former P Series
- Accessories optionally available

Features

- DC-DC converters with extremely wide input covering battery applications from 12 V to 220 V nominal
- Universal AC input with identical form factors
- Inrush current limitation
- Reverse polarity protection
- Up to 300 W output power
- High efficiency, up to 94.5% including input filter
- Ultra-wide output voltage adjustment
- Remote on/off control input
- Current share, redundancy
- Rugged aluminum extruded case, conformally coated assemblies
- Self-cooling, no derating over the specified temperature range
- Compliance with EN 50155, EN 50121-3-2, UL/EN 60950 and National deviations (AREMA, RIA, NFF-F 16)
- Input / output overvoltage protection
- All products are fully transient protected
- No-load, overload and short-circuit protection
- Thermal protection

LR Series Rugged AC-DC Cassettes with PFC



- For use in advanced electronic systems
- Universal input voltage range 90 – 264 VAC
- Inrush current limitation
- Two isolated adjustable outputs (12 V or 15 V or 48 V)
- Output power up to 300 W
- EN50155 and AREMA compliant
- Parallel operation with active current sharing
- Hold-up time 20 ms

AREMA Compliant Power Systems

- High current sub-rack, 5 – 40 A systems, fully redundant
- 1 – 4 MELCHER 150 W AC-DC converters per rack
- Universal fully redundant input 110 / 230 VAC
- Fully redundant outputs of 12-15 VDC or 24 – 30 VDC
- 5 – 40 A of output current
- Test voltage 3000 VAC
- Relay contacts for alarm signals



Isolated PC-Board Mount DC-DC Converters

Bel Power Solutions offers a wide range of PCB-mount DC-DC converters that are especially designed and manufactured for the railway and transportation markets.

MODEL	INPUT VOLTAGE	OUTPUT VOLTAGES	# OF OUTPUTS	OUTPUT POWER	SIZE
IMX4	4.4 – 121 VDC (4 ranges)	3.3, 5, 12, 15 or ± 5 , ± 12 , ± 15 , ± 24	1 or 2	4 W	DIP24, 8.5 mm
IMX7	8.4 – 150 VDC (4 ranges)	3.3, 5 or ± 5 , ± 12 , ± 15 , ± 24	1 or 2	7 W	1" x 2" 10.5 mm
IMX15 / IMY15	8.4 – 150 VDC (3 ranges)	3.3, 5 or ± 5 , ± 12 , ± 15 , ± 24	1 or 2	15 W	1.6" x 2" 10.5 mm
IMX35	9 – 150 VDC (4 ranges)	4x 5, 4x 12, 4x15; 5/ ± 12 , 5/ ± 15	4	35 W	2" x 3" 10.5 mm
IMX70 / IMY70	12 – 154 VDC (2 ranges)	5, 12, 15, ± 24	1 or 2	70 – 90 W	2" x 3" 10.5 mm
0RQB-15Y05x	14 – 154 VDC	5 V @ 3 A	1	15 W	1/8 brick modified
0RQB-C5W54L	43 – 154 VDC	54 V @ 3 A	1	162 W	1/4 brick standard
0RQB-C5U54H	16 – 67 VDC	54 V @ 3 A	1	162 W	1/4 brick standard
0RQB-C2Q12x	9 – 36 VDC	12 V @ 13 A	1	156 W	1/4 brick standard
0RQB-D0W12L	66 – 154 VDC	12 V @ 16.7 A	1	200 W	1/4 brick standard
Non-Isolated Boost DC-DC Converter					
IBX15 Series	12 – 154 VDC	49 – 80 V	1	63 – 110 W	2" x 2" x 0.45" / 54 x 54 x 11.5 mm

Features

- Various wide DC input voltage ranges with or without isolation from 7 – 154 VDC, including platforms with 10:1 ratio
- Output voltages from 3.3 – 54 V with trim ranges as wide as 0 – 110% Vout nominal
- Wide operating temperature ranges with startup at -40 °C or below and no derating to 70 °C
- Dip-varnished circuits without potting material for maximum reliability
- Isolated converters with magnetic feedback and I/O test voltages up to 3000 VAC
- Low output ripple and excellent dynamic response
- Maximum flexibility for modular type platforms instead of custom designs
- High shock and vibration resistance
- Input overvoltage and under voltage lockout protection
- Current limit and short-circuit protection
- Thermal protection
- Output overvoltage protection (OVP)
- Input transient protection




Modular Building Blocks for max flexibility and 10:1 Input (15 VDC - 154 VDC)

The new IBX15 and IMY70 / IMY15 Series combined offer a 10:1 ratio input platform for battery voltages from nominal 24 V to 110 V, with a multitude of isolated DC output options. The IMY range of DC-DC converters combines single or multiple output voltages between 3.3 V – 48 V with up to 90 W of power.

In order to explore the unique benefits of the IBX/IMY power solutions, a bare PCB demo board is available for free on request. For further information please contact our Field Application Engineering team.

The IBX/IMY Concept practically replaces full custom solutions:

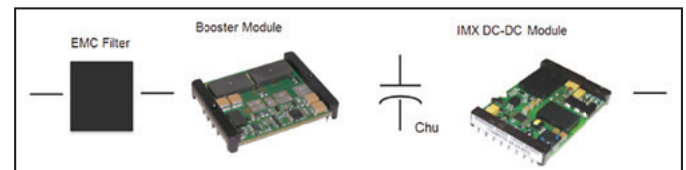



Railway Converters by Bel Power Solutions

Bel Power Solutions is one of the largest power supply manufacturers in the world and has a long history of providing leading edge, innovative power solutions.

Under the MELCHER brand, Bel provides the leading manufacturers in the railway and transportation industry worldwide with high performance, rugged DC-DC and AC-DC converters. With over 40 years of design and manufacturing experience MELCHER products are designed to meet the highest national and international standards for harsh environments, safety and EMC/EMI and undergo rigorous and extensive EVT/DVT and HALT/HASS test. Our strict engineering guidelines ensure low component stress, thermal profiling and high phase margins for stability and dynamic response – all part of our highly reliable converter designs.

Features

- Compliance with International and National standards (EN, UL, AREMA, RIA, NFF) in particular, EN 50155, EN 50121
- Fire safety according to EN 45545 for hazard levels HL1 to HL3
- Ultra-wide DC input voltage, up to 10:1 ratio, suitable for all common battery input voltages worldwide
- Extremely high efficiencies
- Fully featured, full fault protection: Transient, overtemperature, over/undervoltage, overcurrent,
- 3.3 to 96 V output voltages with wide trim range
- Series and parallel or fully redundant configurations
- On/off control, current share and other options
- Extended ambient operating temperature to -40 °C or lower on request
- Convection and conduction cooling with no derating up to 70 °C
- All PC boards dip-varnished for high mechanical durability and humidity withstand, without use of potting material
- Shock and vibration resistance
- Basic or reinforced insulation, test voltages up to 3000 VAC
- Multi-platform approach for highest flexibility
- All products are fully RoHS compliant





AUSTRIA

Schönbrunner Str. 297-307
A-1120 Vienna
Phone: +43 1 86642 0
Fax: +43 1 86642 250
wien@avnet-abacus.eu

BELGIUM

Eagle Building
Kouterveldstraat 20
B-1831 Diegem
Phone: +32 (0)2 7099 002
Fax: +32 (0)2 7099 801
diegem@avnet-abacus.eu

BELARUS

c/o Avnet Abacus Russia
Office 26, Building 2
10 Korovinskoye Shosseee,
127486 Moscow
Phone: +7 (495) 737 3689
Fax: +7 (495) 737 3686
belarus@avnet-abacus.eu

BULGARIA

c/o Avnet Abacus Austria
Schönbrunner Str. 297-307
A-1120 Vienna
Phone: +43 1 86642 0
Fax: +43 1 86642 250
bulgaria@avnet-abacus.eu

CROATIA

c/o Avnet Abacus Slovenia
Dunajska Cesta 167
1000 Ljubljana
Phone: +386 (0)1 560 97 54
Fax: +386 (0)1 560 98 78
croatia@avnet-abacus.eu

CZECH REPUBLIC

c/o Avnet Abacus Austria
Schönbrunner Str. 297-307
A-1120 Vienna
Phone: +43 1 86642-0
Fax: +43 1 86642 250
praha@avnet-abacus.eu

DENMARK

Knudlundvej 24
DK-8653 Them
Phone: +45 86 84 84 84
Fax: +45 86 84 82 44
them@avnet-abacus.eu

Lyskær 9, DK-2730 Herlev
Phone: +45 86 84 84 84
Fax: +45 43 29 37 00
herlev@avnet-abacus.eu

EGYPT

Canan Residence
Hendem Cad.
No:54 Ofis A2
Serifali Umraniye Istanbul
TR - 34775 Turkiye
Phone: +90 216 52 88 370
Fax: +90 216 52 88 377
egypt@avnet-abacus.eu

ESTONIA

Aida 5,
EE-80011 Pärnu
Phone: +372 56637737
paernu@avnet-abacus.eu

FINLAND

Pihatörmä 1 B
FI-02240 Espoo
Phone: +358 (0) 207 499 220
Fax: +358 (0) 207 499 240
 espoo@avnet-abacus.eu

FRANCE

Immeuble Carnot Plaza
14 Avenue Carnot
91349 Massy Cedex, Paris
Phone: +33 (0) 1 6447 2929
Fax: +33 (0) 1 6447 9150
paris@avnet-abacus.eu

8 chemin de la Terrasse
Bat D 1er étage
31500 Toulouse
Phone: +33 (0) 5 6247 4787
Fax: +33 (0) 5 6247 4761
toulouse@avnet-abacus.eu

35 avenue des Peupliers
Les Peupliers2
35510 Cesson
Phone: +33 (0) 2 9983 7720
Fax: +33 (0) 2 9983 4829
rennes@avnet-abacus.eu

Parc Club du Moulin à Vent
Bât 10, 33 rue du Dr. G Lévy
F-69693 Vénissieux Cedex,
Lyon
Phone: +33 (0) 4 7877 1370
Fax: +33 (0) 4 7877 1391
lyon@avnet-abacus.eu

GERMANY

Englische Str. 27
D - 10587 Berlin
Phone: +49 (0) 30 790 997 0
Fax: +49 (0) 30 790 997 51
berlin@avnet-abacus.eu

Industriestr. 26
D-76297 Stutensee
Phone: +49 (0)7249 910 149
Fax: +49 (0)7249 910 177
stutensee@avnet-abacus.eu

Wilhelmstr. 1, D-59439
Holzwickede / Dortmund
Phone: +49 (0) 2301 2959 27
Fax: +49 (0) 2301 2959 29
dortmund@avnet-abacus.eu

Oehleckerring 9a - 13
22419 Hamburg
Phone: +49 (0) 40 608 23 59 0
Fax: +49 (0) 40 608 23 59 20
hamburg@avnet-abacus.eu

Gruber Str. 60c-60d
D-85586 Poing / Munich
Phone: +49 (0) 8121 777 03
Fax: +49 (0) 8121 777 531
muenchen@avnet-abacus.eu

Lina-Ammon-Str. 19 b
D-90471 Nürnberg
Phone: +49 (0) 911 244 250
Fax: +49 (0) 911 244 25 25
nuernberg@avnet-abacus.eu

Gutenbergstr. 15
D-70771 Leinfelden-
Echterdingen / Stuttgart
Phone: +49 (0) 711 78260 02
Fax: +49 (0) 711 78260 333
stuttgart@avnet-abacus.eu

Gaußstraße 10
D-31275 Lehrte
Phone: +49 (0) 5132 5099 0
Fax: +49 (0) 5132 5099 76
lehrte@avnet-abacus.eu

GREECE

c/o Avnet Abacus Austria
Schönbrunner Str. 297-307
A-1120 Vienna
Phone: +43 1 86642-0
Fax: +43 1 86642 250
greece@avnet-abacus.eu

HUNGARY

c/o Avnet Abacus Austria
Schönbrunner Str. 297-307
A-1120 Vienna
Phone: +43 1 86642-0
Fax: +43 1 86642 250
budapest@avnet-abacus.eu

IRELAND

c/o Avnet Abacus Bolton
Oceanic Building
Waters Meeting Road
Bolton BL1 8SW
Phone: +44 (0)1204 547170
Fax: +44 (0)1204 547171
bolton@avnet.eu

ITALY

Via Manzoni 44
I-20095 Cusano Milanino
(Milano)
Phone: +39 02 660 921
Fax: +39 02 66092 332
milano@avnet-abacus.eu

Viale dell'industria 23
I-35129 Padova
Phone: +39 049 7800 381
Fax: +39 049 7730 36
padova@avnet-abacus.eu

Via Zoe Fontana 220
I-00131 Roma
Phone: +39 06 4123 1952
Fax: +39 06 4192 618
roma@avnet-abacus.eu

Via Scaglia Est. 31/33
41126 Modena
Phone: +39 059 34891
Fax: +39 059 344993
modena@avnet-abacus.eu

Via Panciatichi 40/11
I-50127 Firenze
Phone: +39 055 436 1928
Fax: +39 055 428 8810
firenze@avnet-abacus.eu

LATVIA

c/o Avnet Abacus Poland
Plac Solny 16
PL-50-062 Wrocław
Phone: +48 71 34 205 99
Fax: +48 71 34 229 10
latvia@avnet-abacus.eu

LITHUANIA

c/o Avnet Abacus Poland
Plac Solny 16
PL-50-062 Wrocław
Phone: +48 71 34 205 99
Fax: +48 71 34 229 10
lithuania@avnet-abacus.eu

NETHERLANDS

Stadionstraat 2, 6th fl.
NL-4815 NG Breda
Phone: +31 (0) 76 57 22 300
Fax: +31 (0) 76 57 22 303
breda@avnet-abacus.eu

NORWAY

Ryensvingen 3 B
N-0680 Oslo
Phone: +47 (0) 22 70 76 60
Fax: +47 (0) 22 70 76 61
oslo@avnet-abacus.eu

POLAND

Plac Solny 16
PL-50-062 Wrocław
Phone: +48 71 34 205 99
Fax: +48 71 34 229 10
wroclaw@avnet-abacus.eu

PORTUGAL

Tower Plaza, Rot. Eng. Edgar
Cardoso, 23, Pl. 14, Sala E
PT-4400-676 Vila Nova
de Gaia
Phone: +351 223 779502
Fax: +351 223 779503
portugal@avnet-abacus.eu

ROMANIA

c/o Avnet Abacus Slovenia
Dunajska Cesta 159
1000 Ljubljana
Phone: +386 (0)1 560 97 54
Fax: +386 (0)1 560 98 78
romania@avnet-abacus.eu

RUSSIA

Office 31, Building 2
10 Korovinskoye Shosse
127486 Moscow
Phone: +7 (495) 737 3689
Fax: +7 (495) 737 3686
moscow@avnet-abacus.eu

SERBIA

c/o Avnet Abacus Slovenia
Dunajska Cesta 167
1000 Ljubljana
Phone: +386 (0)1 560 97 54
Fax: +386 (0)1 560 98 78
serbia@avnet-abacus.eu

SLOVAKIA

c/o Avnet Abacus Austria
Schönbrunner Str. 297-307
A-1120 Vienna
Phone: +43 1 86642-0
Fax: +43 1 86642 250
slovakia@avnet-abacus.eu

SLOVENIA

Dunajska Cesta 167
1000 Ljubljana
Phone: +386 (0)1 560 97 54
Fax: +386 (0)1 560 98 78
ljubljana@avnet-abacus.eu

SPAIN

NyN Tower, C/ Tarragona,
151-157, Floor 19
ES-08014 Barcelona
Phone: +34 (0) 93 327 85 50
Fax: +34 (0) 93 425 05 44
barcelona@avnet-abacus.eu

Plaza Zabalgane
12 Bajo Izda,
Galdakao / Vizcaya
ES -48960 Bilbao
Phone: +34 (0) 94 457 0044
Fax: +34 (0) 94 456 8855
bilbao@avnet-abacus.eu

C/Chile, 10 2ª Pta.
Oficina 229
ES -28290 Las Matas / Madrid
Phone: +34 (0) 913 72 7200
Fax: +34 (0) 916 36 9788
madrid@avnet-abacus.eu

SWEDEN

Löfströms Allé 5,
Sundbyberg, Box 1830,
SE-171 27 Solna
Phone: +46 (0) 858 746200
Fax: +46 (0) 858 746 001
stockholm@avnet-abacus.eu

Smörhålevägen 3
SE-43442 Kungsbacka
Phone: +46 (0)8 58746 200
Fax: +46 (0)300 140 15
gothenburg@avnet-abacus.eu

SWITZERLAND

Bernstrasse 392
CH-8953 Dietikon
Phone: +41 (0) 43 322 49 90
Fax: +41 (0) 43 322 49 99
zurich@avnet-abacus.eu

TURKEY

Canan Residence
Hendem Cad.
No:54 Ofis A2
Serifali Umraniye Istanbul
TR - 34775 Turkiye
Phone: +90 216 52 88 370
Fax: +90 216 52 88 377
istanbul@avnet-abacus.eu

UK

First Floor, The Gatehouse
Gatehouse Road
Aylesbury, Bucks
HP19 8DB
Phone: +44 (0) 1296 678920
Fax: +44 (0) 1296 678939
aylesbury@avnet.eu

Building 5
Waltham Park
White Waltham
Maidenhead
Berkshire SL6 3TN
Phone: +44 (0)1628 512900
Fax: +44 (0)1628 512999
maidenhead@avnet.eu

Avnet House
Rutherford Close
Meadway,
Stevenage
Hertfordshire SG1 2EF
Phone: +44 (0)1438 788 500
Fax: +44 (0)1438 788 250
stevenage@avnet.eu

Oceanic Building
Waters Meeting Road
Bolton
BL1 8SW
Phone: +44 (0)1204 547170
Fax: +44 (0)1204 547171
bolton@avnet.eu

UKRAINE

c/o Avnet Abacus Poland
Plac Solny 16
PL-50-062 Wrocław
Phone: +48 71 34 205 99
Fax: +48 71 34 229 10
ukraine@avnet-abacus.eu